



# LED WATERPROOF LAMP



## Technical Drawing

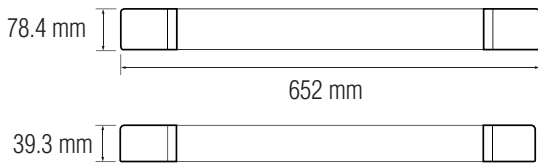

## Photometric Diagram

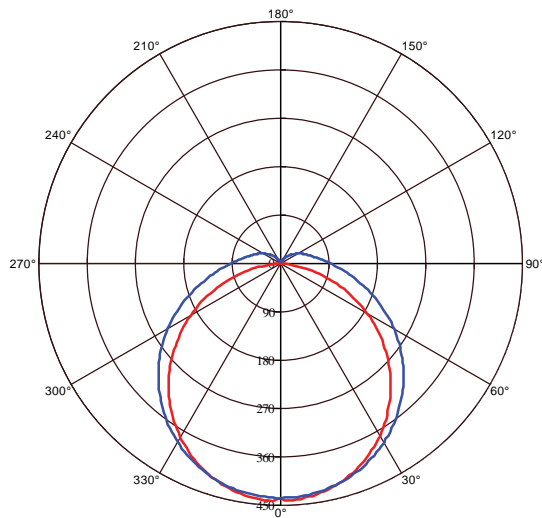

↳ C0 Plane beam angle(50%)    ↳ C90 Plane beam angle(50%)  
C0 Plane beam angle(50%):110.3(DEG)    C90 Plane beam angle(50%):127.5(DEG)

## Technical Data

Voltage (V)	170-265V
Product Wattage (W)	18
Equivalence with incandescent lamp(W)	144
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	4200K / 6400K
Materials	PC Cover
Protection Class	II
Dimmable	No
EEI	A to A++
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	1440
Luminous Efficacy (lm/W)	80
Rated Life (hrs) ⌚	30.000
IP Rating	65
Power Factor	>0.5
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x15.000

## Applications

- Under shop awnings, car parks, school perimeters, warehouse.



## Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Very low energy consumption.

